

# Tyger Tail® Hose

Tyger-Tail® hoses are used to protect sewer cleaning hose to guide hose through rough manholes and pipe edges of the transition in to the pipe. Tyger-tail hoses are offered standard in 2"x36" and 3"x36" lengths and include a 24' poly rope with a looped end for easy grip.

This rope is attached to the Tyger-Tail hose collar to make installation and removal from manholes easier. Stays flexible in sub-zero temperatures




Includes Cuffs on Each End

<u>Size</u>	<u>Part #</u>	<u>Weight</u>
2" x 10'	D0-210	8.5 lbs
2" x 20'	D0-220	17 lbs
2" x 25'	D0-225	21.25 lbs
2" x 30'	D0-230	25.50 lbs
2" x 40'	D0-240	34.00 lbs
2" x 50'	D0-250	42.50 lbs

Complete Assemblies Below Include:  
Cuff on Each End, Clamp & 24' Poly Rope

2" x 36"	D0-69	3 lbs
3" x 36"	D0-89	5 lbs

3" x 10'	D0-310	16 lbs
3" x 20'	D0-320	33 lbs
3" x 25'	D0-325	40 lbs
3" x 30'	D0-330	48 lbs
3" x 40'	D0-340	64 lbs
3" x 50'	D0-350	80 lbs

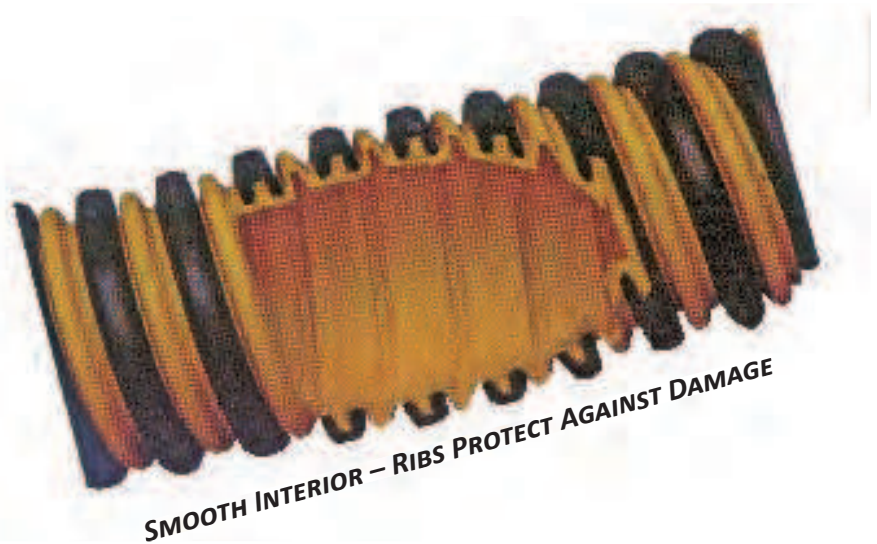

<u>Size</u>	<u>Weight</u> (Per Foot)	<u>Max. Working</u> <u>Pressure - PSI</u>
2"	.85 lbs	15
3"	1.60 lbs	7

Vacuum Mercury Inch - 29

Many uses for the hose are:

- \*Liquid or material suction from machine to machine
- \*Liquid transfer from truck to depot
- \*Liquid transfer from vat to tank
- \*Construction and excavation
- \*Protection for sewer cleaning hose
- \*Protection for televising tv cable